

COLD.R



COMBINES WITH COLD.X OR COLD.W

NO NEED FOR INSULATED DUCT SYSTEM


COLD.R is an air heat recovery exchanger used in case of existing MVHR installations where the supply distribution system cannot be insulated. COLD.R raises the leaving air temperature from the COLD.W or COLD.X unit to around 20°C. This is normally above the dew point of air inside the building, thereby preventing condensation from forming on the outside of the ducts and elements of the distribution system.

The new COLD.R utilizes air connections made of Ubbink Aerfoam insulation piping, which reduces the risk of condensation and allows for quick connection with the rest of the duct system. A ball siphon with fittings is also included in the delivery, minimizing the need for additional materials. The entire package is designed to require minimal extra material for the installer; essentially, only screws and clamps for mounting, and the condensate drain pipe from the included condensate trap onwards, are needed.



COLD.

Powerful cooling for your MVHR system.


Version	COLD.R 4	COLD.R 6
Dimensions (axbxc)	599x490x448mm	740x630x412mm
Weight	20kg	25kg
Air connections (D/d)	212/180mm	232/200mm
Condensate drain connection	DN32	DN32
Max. airflow	400m ³ /h	600m ³ /h

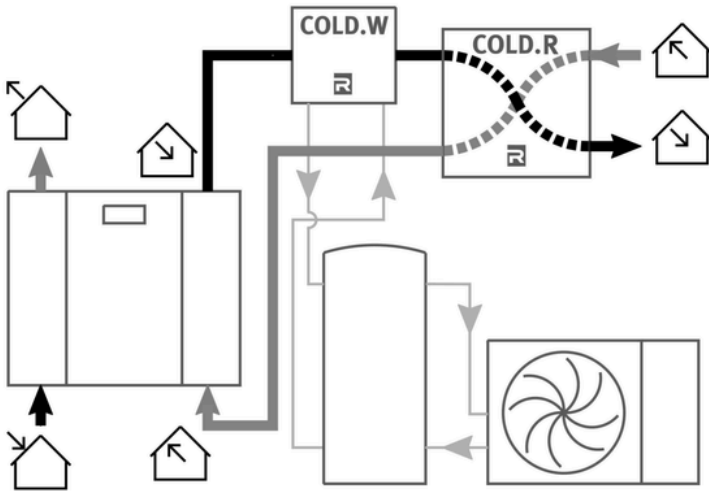

Combination of COLD.W and COLD.R units.

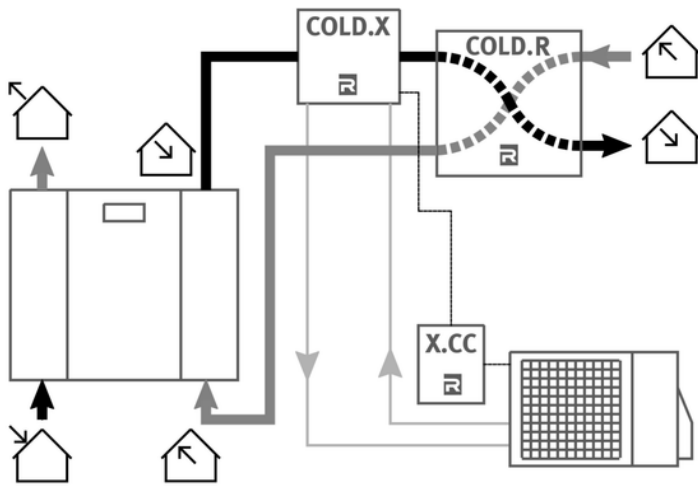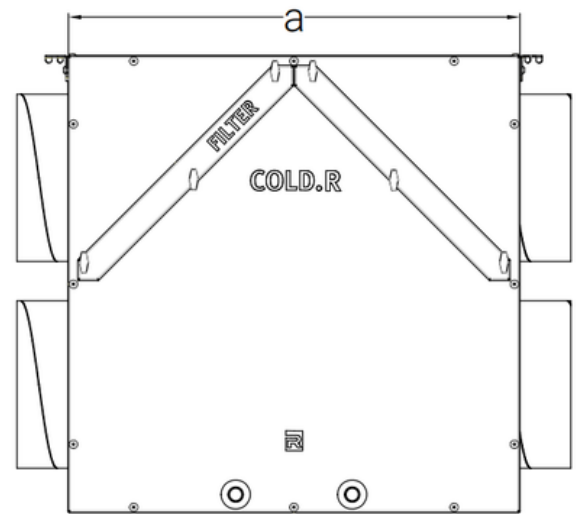

Combination of COLD.X and COLD.R units.

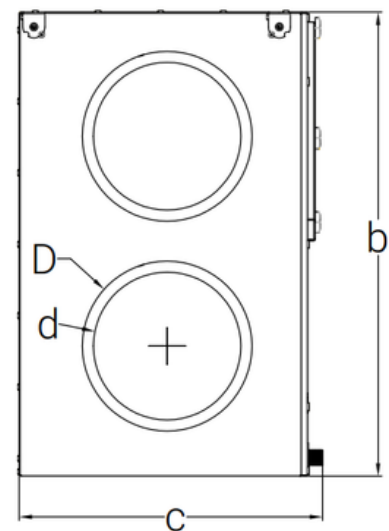

SALE / INSTALLATION / SERVICE